

#3

Patent  
Attorney's Docket No. 032986-000



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of	)	
	)	
Leslie GRAF et. al.	)	Group Art Unit: Unassigned
	)	
Application No.: Unassigned	)	Examiner: Unassigned
	)	
Filed: September 29, 2000	)	
	)	
For: Addressing in a Communications	)	
Network	)	

CLAIM FOR CONVENTION PRIORITY

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

The benefit of the filing date of the following prior foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

United Kingdom Patent Application No. 9923121.9

Filed: October 1, 1999

In support of this claim, enclosed is a certified copy of the prior foreign application. The prior foreign application was referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: September 29, 2000

By: Michael G. Savage  
Michael G. Savage  
Registration No. 32,596 EL 581399788US

P.O. Box 1404  
Alexandria, Virginia 22313-1404  
(919) 941-9240

Express Mail mailing label No. 9/29/00  
Date of Deposit 9/29/00  
I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

H. P. Patel  
(Type or printed name of person mailing paper or fee)  
[Signature]  
(Signature of person mailing paper or fee)

(9/99)

THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

Address Marking Instructions  
Date of Deposit  
I hereby certify that the foregoing is a true and correct copy of the original as deposited with the United States Patent Office.  
Express Mail Post Office at Washington, D.C. 20540  
Under 35 CFR 1.522, the fee for each copy and its address to the Commissioner of Patents and Trademarks, Washington, D.C. 20540.

Official Use Only  
This page is to be used by the Patent Office for official use only.



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 1 June 2000

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

- 1 OCT 1999

0100199 1480660-1 D01063  
P01/7700 0.00 - 9923121.9

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

P50895GB

2. Patent application number

(The Patent Office will fill in this part)

**9923121.9**

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Telefonaktiebolaget LM Ericsson  
SE-12625  
Stockholm  
Sweden

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

SWEDEN

763 730 002

4. Title of the invention

ADDRESSING IN A COMMUNICATIONS  
NETWORK

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Marks & Clerk

Marks & Clerk  
4220 Nash Court  
Oxford Business Park South  
Oxford  
OX4 2RU

Patents ADP number (if you know it)

727 1125 001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Best Available Copy

9. Enter the number of sheets of any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form (none)

Description 7

Claim(s) 2

Abstract 1

Drawing(s) 3 + 3

10. If you are also filing any of the following, state how many against each item.

Priority documents (none)

Translations of priority documents (none)

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 7

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) (none)

Any other documents (please specify) (none)

11.

I/We request the grant of a patent on the basis of this application.

Signature *Marks & Clerk*

Marks & Clerk

Date 30, September 1999

12. Name and daytime telephone number of person to contact in the United Kingdom



Dr. Robert Lind 01865 397900

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

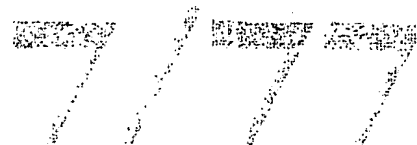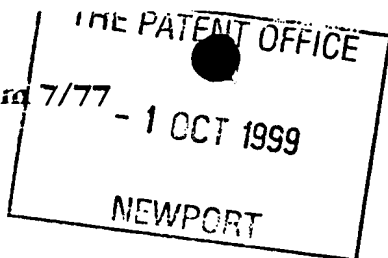

# Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

P50895GB

2. Patent application number

(if you know it)

9923121.9

01 OCT 1999

3. Full name of the or of each applicant

Telefonaktiebolaget LM Ericsson

4. Title of the invention

Addressing In A Communications Network

5. State how the applicant(s) derived the right  
from the inventor(s) to be granted a patent

By virtue of employment of the inventors

6. How many, if any, additional Patents Forms  
7/77 are attached to this form?

(see note (c))

6

7.

I/We believe that the person(s) named over the page (and on  
any extra copies of this form) is/are the inventor(s) of the invention  
which the above patent application relates to.

Signature

Marks & Clerk

Date

Marks & Clerk

30 September 1999

8. Name and daytime telephone number of  
person to contact in the United Kingdom

Dr. Robert Lind

01865 397900

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Leslie Graf  
3 Hender Court  
Balwyn, 3103  
Melbourne  
Australia

Patents ADP number (if you know it):

7670573001

Mark Hollis  
1 Daintree Avenue  
Park Orchards 3114  
Australia

Patents ADP number (if you know it):

7670581001

Stephen Terrill  
C/- Hamacher  
Flemmingatan 45, 4TR  
11232 Stockholm  
Sweden

Patents ADP number (if you know it):

7670607001

Reminder

Have you signed the form?



Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Chrstian Groves  
21 Garden Avenue  
Keilor  
Victoria 3036  
Australia

7670613001

Patents ADP number (if you know it):

Juan Noguera-Rodriguez  
3/48 Deakin Street  
Essendon  
Victoria 3040  
Australia

7670680001

Patents ADP number (if you know it):

Ian Rytina  
c/o Lund  
Gotlandsgatan 58, str  
116 65 Stockholm  
Sweden

75361001

Patents ADP number (if you know it):

Reminder

Have you signed the form?

**THIS PAGE BLANK (USPTO)**

## ADDRESSING IN A COMMUNICATIONS NETWORK

### Field of the Invention

The present invention relates to addressing in a communications network and in particular to addressing in a communications network in which network nodes are split into a call control part and a bearer control part.

### Background to the invention

Telecommunications networks currently rely to a large extent upon the Signalling System no.7 (SS7) as the mechanism for controlling call connections and for handling the transfer of signalling information between signalling points of the networks. Typically, one or more application and user parts at a given signalling point will make use of SS7 to communicate with peer application and user parts at some other signalling point. Examples of user parts are ISUP (ISDN User Part) and TUP (Telephony User Part) whilst examples of application parts are INAP (Intelligent Network Application Part) and MAP (Mobile Application Part). The conventional SS7 protocol stack includes Message Transfer Parts MTP1, MTP2, and MTP3 which handle the formatting of signalling messages for transport over the physical layer as well as various routing functions.

There has been considerable interest of late amongst the telecommunications community in using non-standard (i.e. non-conventional within the telecommunications industry) signalling transport mechanisms in telecommunications networks in place of the conventional SS7 mechanisms. The reasons for this are related both to improvements in efficiency as well as potential cost savings. Much consideration has been given for example to the use of Internet Protocol (IP) networks to transport signalling information between signalling points. IP networks have the advantage that they make efficient use of transmission resources by using packet switching and are relatively low in cost due to the widespread use of the technology (as opposed to

specialised telecommunication technology). There is also interest in using other transport mechanisms including AAL1/2/5, FR etc.

ISUP, which deals with the setting-up and control of call connections in a telecommunications network, is closely linked to the SS7 signalling transport mechanism and does not readily lend itself to use with other non-standard transport technologies such as IP and AAL2. As such, several standardisation bodies including the ITU-T, ETSI, and ANSI, are currently considering the specification of a signalling protocol for the control of calls, which is independent of the underlying transport mechanism. This is illustrated in Figure 1 and can be viewed as separating out from the protocol, Bearer Control functions which relate merely to establishing the parameters (including the start and end points) of the "pipe" via which user plane data is transported between nodes, and which are specific to the transport mechanism. The new protocol, referred to as Bearer Independent Call Control (BICC) or Transport Independent Call Control (TICC), retains Call Control functions such as the services invoked for a call between given calling and called parties (e.g. call forwarding), and the overall routing of user plane data.

The new network architecture resulting from the separation of the Call and Bearer Control levels results in an open interface appearing between a Call Control entity and a Bearer Control entity, where these entities are referred to as a Media Gateway Controller and a Media Gateway respectively. The open interface is referred to hereinafter as X-CP, examples of which are the MEGACO work of the IETF and the H.248 work of ITU Study Group 16 (SG16). It is envisaged that a given Media Gateway Controller may control several Media Gateways.

Despite the decoupling of the Call and Bearer Control levels, it remains necessary to convey information about the Bearer Control level at the Call Control level in order to establish bearer connections between Media Gateways for a call. In particular, it is necessary to convey on a per call basis the addresses of Media Gateways between peer Media Gateway Controllers, where the identified Media Gateways are responsible for handling the bearer connection for the call. Current proposals are to provide an

addressing mechanism in the BICC protocol which is specific to ITU-T E.164 addresses.

#### Summary of the Present Invention.

In order to maximise the flexibility of the BICC protocol, it is desirable to avoid making it specific to a given transport technology, e.g. IP or AAL2. This will necessitate the provision of an addressing mechanism within the BICC protocol which caters for different address formats. This flexibility is not afforded by the current proposal to restrict BICC addressing to the use of E.164 addresses.

The inventors of the present invention have recognised that a flexible addressing mechanism suitable for use in the BICC protocol is provided by ITU-T recommendation X.213 which defines the so-called Network Service Access Point (NSAP) addressing format.

According to a first aspect of the present invention there is provided a method of signalling in a communications system comprising a Call Control level and a Bearer Control level, where the Call Control level comprises a plurality of Media Gateway Controllers and the Bearer Control level comprises a plurality of Media Gateways each of which is controlled by a Media Gateway Controller, the method comprising allocating to each Media Gateway at least one address, which address corresponds to one of a plurality of different addressing formats, and conveying these addresses between peer Media Gateway Controllers by encapsulating them using the Network Service Access Point (NSAP) addressing format.

The present invention may be used in a telecommunications network in which the Call Control level is used to establish and control call connections, e.g. between a calling party and a called party, at the Bearer Control level.

The Media Gateways provide access to transport networks which extend between peer Media Gateways. These transport networks may be, for example, IP, AAL2, or ATM networks. The format of the at least one address allocated to a Media Gateway is the

format used by a transport network to which that Media Gateway provides access. Where a Media Gateway provides access to two or more transport networks, the Media Gateway may be allocated respective addresses.

According to a second aspect of the present invention there is provided a communications system comprising:

- a Call Control level comprising a plurality of Media Gateway Controllers; and
- a Bearer Control level comprising a plurality of Media Gateways each of which is controlled by a Media Gateway Controller and each of which is allocated at least one address which address corresponds to one of a plurality of different addressing formats, wherein said peer Media Gateway Controllers are arranged to communicate Media Gateway addresses by encapsulating them using the Network Service Access Point (NSAP) addressing format.

According to a third aspect of the present invention there is provided a Media Gateway Controller of a communications system, the Media Gateway Controller comprising:

- means for communicating with at least one Media Gateway Controller for the purpose of establishing and controlling call connections over a transport network to which the Media Gateway is coupled, the media gateway being allocated at least one address which address corresponds to one of a plurality of different addressing formats; and

- means for communicating with at least one peer Media Gateway Controller using a Bearer Independent Call Control (BICC) protocol, the BICC protocol conveying Media Gateway addresses by encapsulating them using the Network Service Access Point (NSAP) addressing format.

#### Brief Description of the Drawings

Figure 1 illustrates a telecommunications network in which the Call Control level is independent of the Bearer level;

Figure 2 illustrates a telecommunications network comprising Media Gateway Controllers and Media Gateways;

Figure 3 illustrates the structure of an NSAP address;

Figure 4 illustrates a forward call set-up process in the network of Figure 2; and Figure 5 illustrates a backward call set-up process in the network of Figure 2.

#### Detailed Description of Certain Embodiments

Figure 1 illustrates in very general terms a telecommunications network in which signalling points are split into Media Gateway Controllers and Media Gateways, where the Media Gateway Controllers form a Call Control (CC) layer and the Media Gateways form a Bearer Control (BC) layer. Figure 2 provides a more detailed illustration of an example network

The CC level comprises a number of Media Gateway Controllers (MGC\_A, MGC\_B, MGC\_C) whilst the BC level comprises a number of Media Gateways (MG\_1 to MG\_4). As is apparent from Figure 2, each of the Media Gateway Controllers is arranged to control either one or two Media Gateways via an open interface (X-CP\_1 to X-CP\_3). A first pair of Media Gateways (MG\_1, MG\_4) provide a bearer connection over an intervening IP transport network, whilst a second pair of Media Gateways (MG\_2, MG\_3) provide a bearer connection over an intervening AAL2 network which uses the Q.2630.1 signalling protocol. In addition, Media Gateway MG\_1 is connected to a second IP network whilst Gateways MG\_2 to MG\_4 are connected to respective second, third, and fourth AAL2 networks.

In order to send and receive data over a transport network (IP or AAL2), a Media Gateway must have an address in that network, the address using the network's addressing format. Thus, for example, the Media Gateways MG\_1 and MG\_4 must be allocated an IP address for use over the intervening IP network. Media Gateway MG\_1 may use that same address to communicate over the second IP network or it may be allocated a different address for use in that network. Similarly, the Media Gateways MG\_2 to MG\_4 must be allocated an AAL2 address for use in the AAL2 networks with which they communicate. The actual process by which these transport network addresses are allocated will not be described here in detail. It is suffice to note that an address allocated to a Media Gateway for use over a given transport network will be unique within that network.

In order to allow the BICC protocol to be compatible with a range of transport networks, it is proposed here to use in that protocol the addressing format defined by ITU-T recommendation X.213. This is known as the Network Service Access Point (NSAP) addressing format. An NSAP address has the structure illustrated in Figure 3.

The initial domain part of the NSAP address consists of two parts. The first part is the authority and format identifier (AFI) and the second part is the initial domain identifier (IDI). The authority and format identifier (AFI) specifies:

- a) the format of the IDI;
- b) the network addressing authority responsible for allocating values of the IDI;
- c) whether or not leading zero digits in the IDI are significant; and
- d) the abstract syntax of the DSP.

The initial domain identifier specifies:

- a) the network addressing domain from which values of the DSP are allocated;  
and
- b) the network addressing authority responsible for allocating values of the DSP  
from that domain.

The semantics of the DSP are determined by the network addressing authority identified by the IDI.

Figure 4 illustrates a first call set-up scenario, i.e. a forward bearer set up scenario. In this example, signalling is conducted over the CC level between Media Gateway Controllers MGC\_A and MGC\_B to establish a bearer level connection between Media Gateways MG\_2 and MG\_3. The process commences with an Initial Address Message (IAM) being sent from Media Gateway Controller MGC\_A to Media Gateway Controller MGC\_B. Media Gateway Controller MGC\_B responds to receipt of this message by returning to Media Gateway Controller MGC\_A an APplication transport Mechanism (APM - defined in Q.765) message. The APM message contains an NSAP address which in turn contains the address of the Media Gateway MG\_3 in the AAL2 network linking Media Gateway MG\_2 and Media Gateway MG\_3. Media Gateway



Controller MGC\_A passes the AAL2 address of Media Gateway MG\_3 to Media Gateway MG\_2. Media Gateway MG\_2 then sends an Establish ReQuest (ERQ) message containing in its destination address field the AAL2 address of Media Gateway MG\_3. Media Gateway MG\_3 can then return a confirmation Establish ConFirm (ECF) message back to MG\_2. Both the ERQ and the ECF messages are defined by the Q.2630.1 signalling protocol.

Figure 5 illustrates a backward bearer set up scenario in which the IAM message sent from the Media Gateway Controller MGC\_A contains the AAL2 address, encapsulated in NSAP format, of Media Gateway MG\_2. An ERQ message, including in its destination address field the AAL2 address of Media Gateway MG\_2, is then sent from the Media Gateway MG\_3. The ECF message is subsequently returned from the Media Gateway MG\_2 to Media Gateway MG\_3.

It will be appreciated by the person of skill in the art that various modifications may be made to the above described embodiment without departing from the scope of the present invention.

## CLAIMS

1. A method of signalling in a communications system comprising a Call Control level and a Bearer Control level, where the Call Control level comprises a plurality of Media Gateway Controllers and the Bearer Control level comprises a plurality of Media Gateways each of which is controlled by a Media Gateway Controller, the method comprising allocating to each Media Gateway at least one address, which address corresponds to one of a plurality of different addressing formats, and conveying these addresses between peer Media Gateway Controllers by encapsulating them using the Network Service Access Point (NSAP) addressing format.
2. A method according to claim 1, wherein the communications network is a telecommunications network in which the Call Control level is used to establish and control call connections between a calling party and a called party at the Bearer Control level.
3. A method according to claim 1 or 2, wherein the Media Gateways provide access to transport networks which extend between peer Media Gateways, and the networks using one of IP, AAL2, or ATM transmission mechanisms.
4. A method according to any one of the preceding claims, wherein the format of the at least one address allocated to a Media Gateway is the format used by a transport network to which that Media Gateway provides access.
5. A communications system comprising:
  - a Call Control level comprising a plurality of Media Gateway Controllers; and
  - a Bearer Control level comprising a plurality of Media Gateways each of which is controlled by a Media Gateway Controller and each of which is allocated at least one address which address corresponds to one of a plurality of different addressing formats,wherein said peer Media Gateway Controllers are arranged to communicate Media Gateway addresses by encapsulating them using the Network Service Access Point (NSAP) addressing format.

6. A Media Gateway Controller of a communications system, the Media Gateway Controller comprising:



means for communicating with at least one Media Gateway Controller for the purpose of establishing and controlling call connections over a transport network to which the Media Gateway is coupled, the media gateway being allocated at least one address which address corresponds to one of a plurality of different addressing formats; and

means for communicating with at least one peer Media Gateway Controller using a Bearer Independent Call Control (BICC) protocol, the BICC protocol conveying Media Gateway addresses by encapsulating them using the Network Service Access Point (NSAP) addressing format.

**ABSTRACT**  
**ADDRESSING IN A TELECOMMUNICATIONS NETWORK**

A method of signalling in a telecommunications system comprising a Call Control (CC) level and a Bearer Control (BC) level, where the Call Control level comprises a plurality of Media Gateway Controllers (MGC\_A, MGC\_B, MGC\_C) and the Bearer Control level comprises a plurality of Media Gateways (MG\_1 to MG\_4) each of which is controlled by a Media Gateway Controller. The method comprises allocating to each Media Gateway at least one address, which address corresponds to one of a plurality of different addressing formats, and conveying these addresses between peer Media Gateway Controllers by encapsulating them using the Network Service Access Point (NSAP) addressing format.

Figure 2

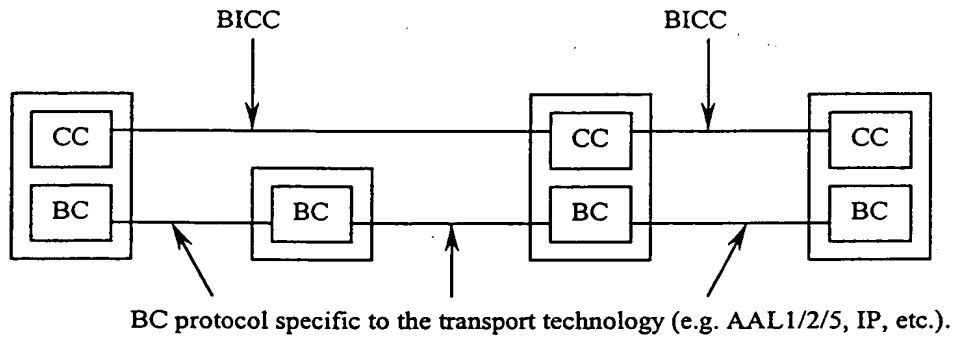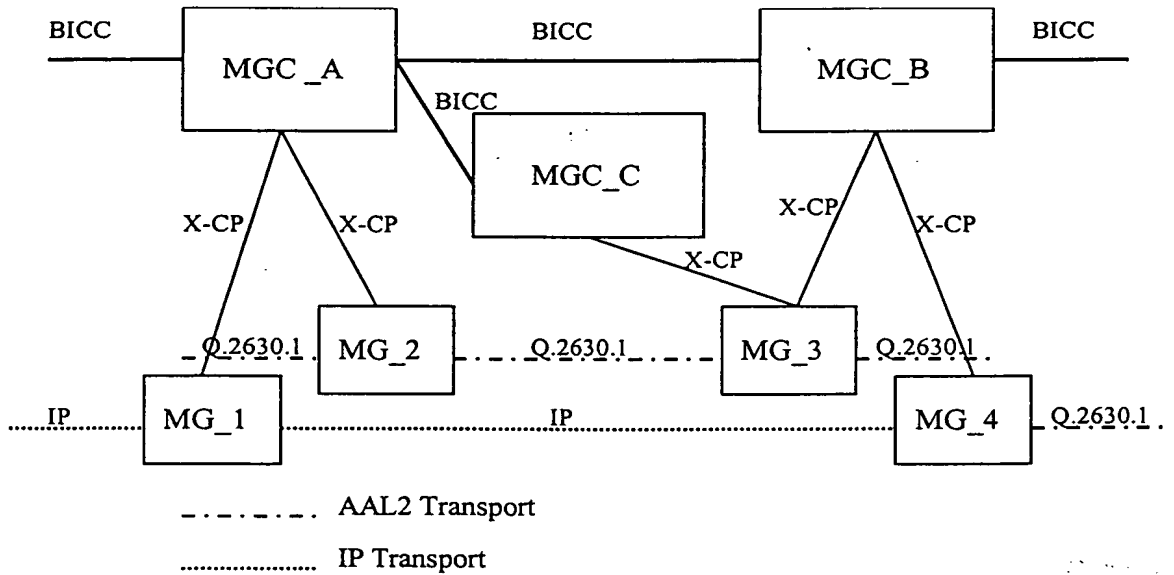Figure 1Figure 2

**This Page Blank (uspto)**

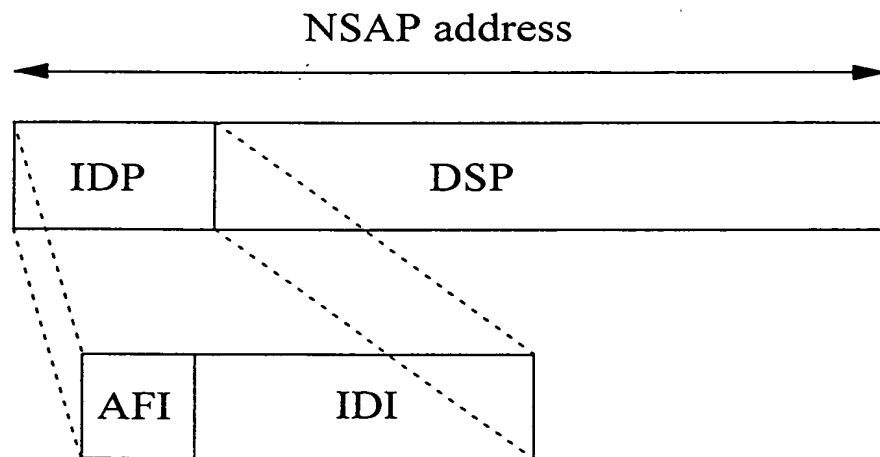


Figure 3

**This Page Blank (uspto)**



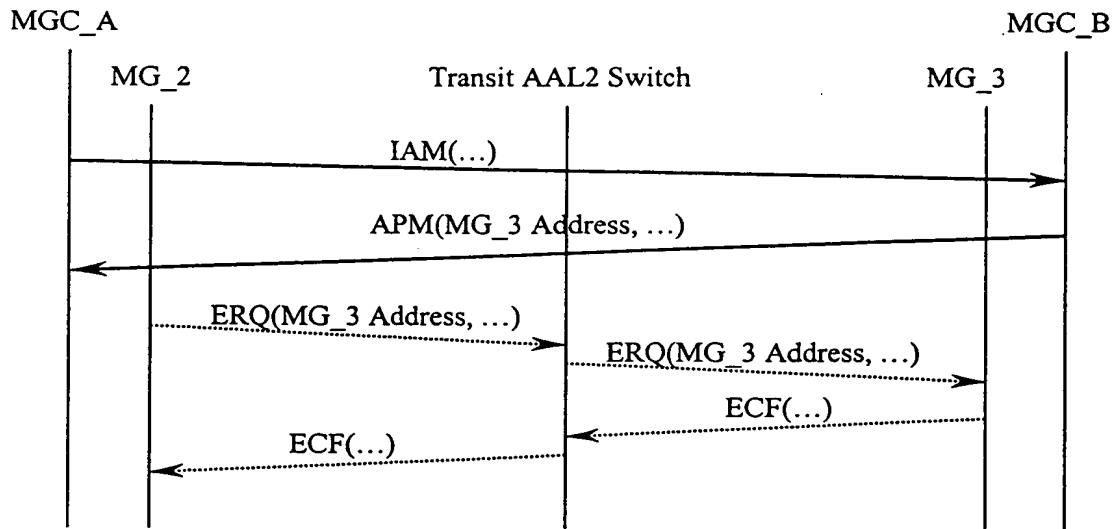


Figure 4

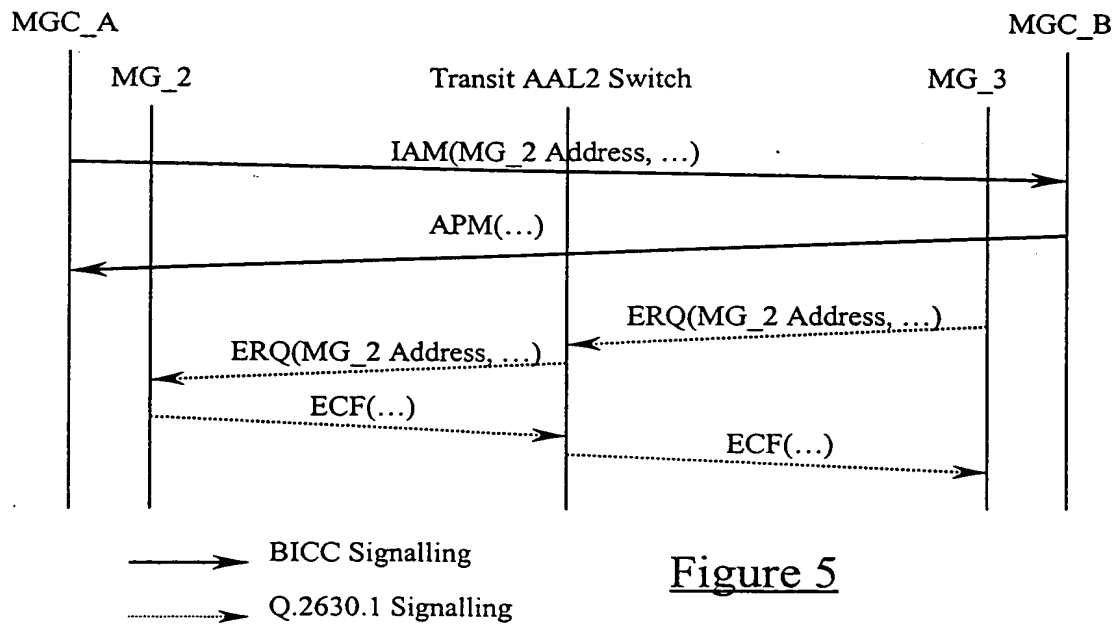


Figure 5

**THIS PAGE BLANK (USPTO)**